
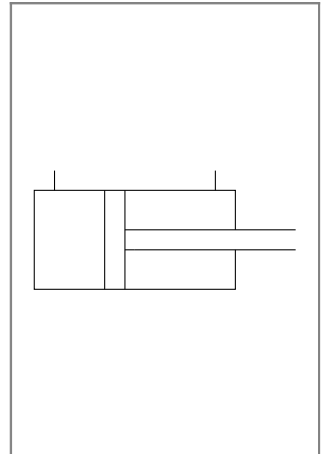


Compact cylinder 20mm diameter

type AD20D-... , double acting

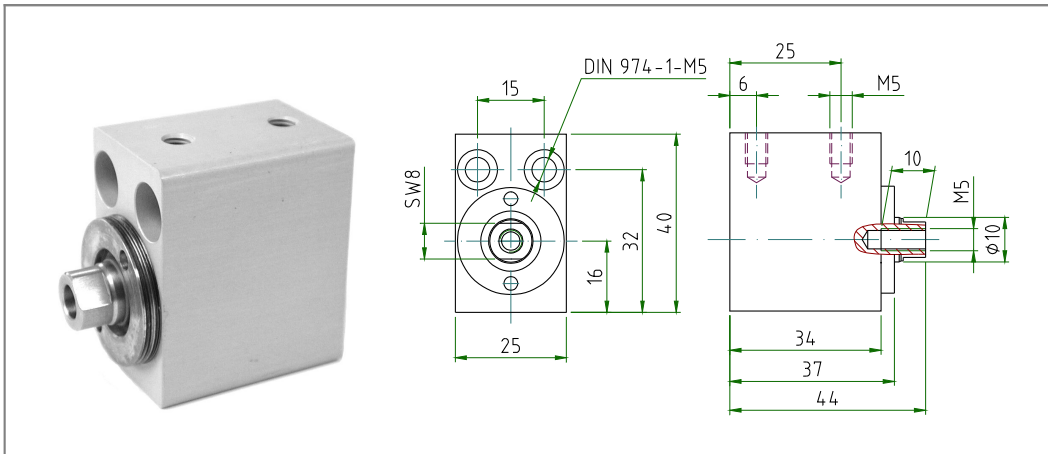

SPECIFICATION	
general	
construction	compact cylinder, pneumatic, double acting, with threaded end plate
bore	20 mm piston diameter
stroke length	5.5 or 10 mm ± 0.05 mm
operation	pneumatic, with pneumatic return
port threads	M5 female
ambient temperature	-20°C to +80°C
fluid temperature	-20°C to +80°C
materials	body: anodised aluminium cover: brass (Ms58) piston rod: stainless steel seals: NBR or polyurethane
cushioning	none
mounting	fixing holes in body or piston rod.
installation position	as required
magnetic sensors	none
pneumatic	
air	filtered, lubricated or non lubricated
pressure range	1 to 8 bar
attainable force	at 6bar: 180 N +, 135 N -

type	article-nr.	stroke	weight (approx. g)
AD20D-05.5	90 000 136	5.5	120
AD20D-10	90 000 137	10	120

NB: It is not possible to handle heavy external objects with this product type