

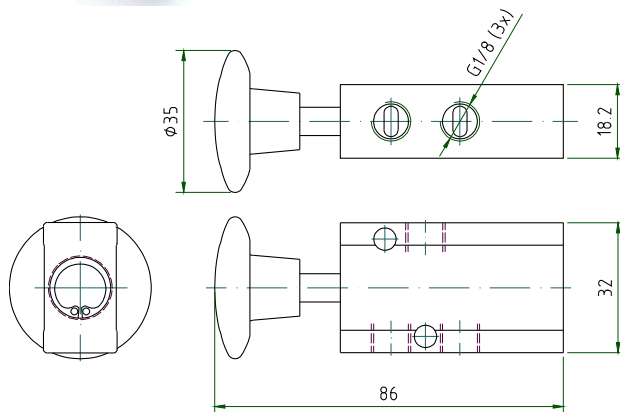


3/2-way valve with internal feedback

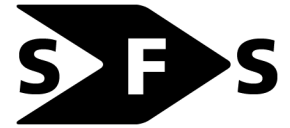

Special feature:

The valve returns to its initial position (NC) if a minimum of 40% of the inlet pressure is not present at the outlet.

Applications:

Compacting presses in the wood products industry.

| SPECIFICATION | |
|--------------------------|---|
| general | |
| design | spool valve |
| actuation | push button |
| return | pneumatic |
| connection | G1/8 internal thread |
| ambient temperature | -20°C to +80°C |
| medium temperature | -20°C to +80°C |
| Material | body, cover, and inner parts: anodized aluminum alloy, brass seals: perbunan (NBR) |
| mounting method | 2 bores for M5 bolts |
| mounting position | any |
| weight | 96 g |
| pneumatic | |
| configuration | 3/2-way NC |
| flow medium | filtered (50 micron), lubricated or unlubricated compressed air (also refrigerant-dried to dew point -20°C) |
| operating pressure range | $p_{max} = 10 \text{ bar}$ |
| nominal size | DN 5mm |