
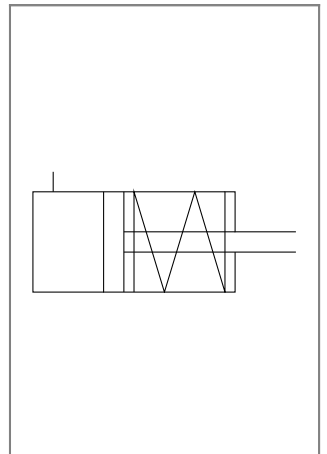
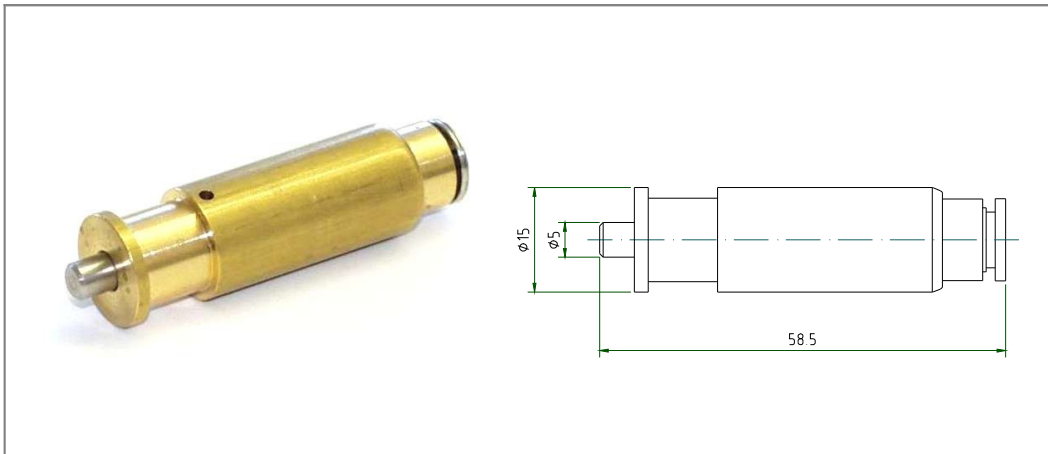


Cylinder Ø12mm, stroke 10mm, single acting

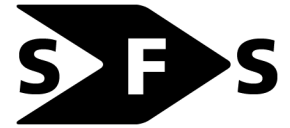

Special feature:

The compact design and mounting method were specially adapted to the customer's mounting dimensions.

Application temperature: -35°C to +80°C

Screw connection built into in the cylinder

Applications:

Central locking system for luggage racks in tour busses

SPECIFICATION	
general	
design	special-purpose cylinder, single-acting
piston diameter	12 mm
stroke lengths	10 mm
actuation	pneumatic
return	spring
connection	push-in type fitting, diameter 6 mm, integrated
ambient temperature	-35°C to +80°C
medium temperature	-35°C to +80°C
material	cylinder body and cover brass; piston rod stainless steel; seals perbunan (NBR) and polyurethane (PUR)
end stop damper	no
mounting method	specially adapted annular groove on cylinder body
mounting position	any
magnetic scanning	no
weight	46 g
pneumatic	
control medium	filtered, lubricated or unlubricated compressed air
operating pressure range	2.5 to 10 bar